


SLK-HD-Rx

HDBaseT PCIe Receiver Card
with HDMI, USB, Audio and
Power Transmission



Specification

Model Name:	SLK-HD-Rx
Form Factor:	Custom
HDBaseT Chip:	VS2310
Graphic Interface:	LVDS
USB:	USB 2.0
Audio:	Audio over USB
Power over HDBaseT:	Up to 100W
Maximum Distance:	100m
Connectors:	RJ45, 2 x USB, LVDS, 2 x Speaker, Power
Power Consumption Card:	5 Watt Typical, Normal Operation
Dimensions W x H x D:	175.5 x 114.5 x 21.6 mm (Excluding DC/DC Converter)
Mounting:	6 Screws
Operating Temperature:	0°C to +50°C, 10% ~ 90% RH non-condensing
Storage Temperature:	-20°C to +60°C, 10% ~ 90% RH non-condensing
Matching Transmitter:	SLK-HD-Tx
Weight:	0.8 Kg
Certification:	CE / RoHS / WEEE Compliant

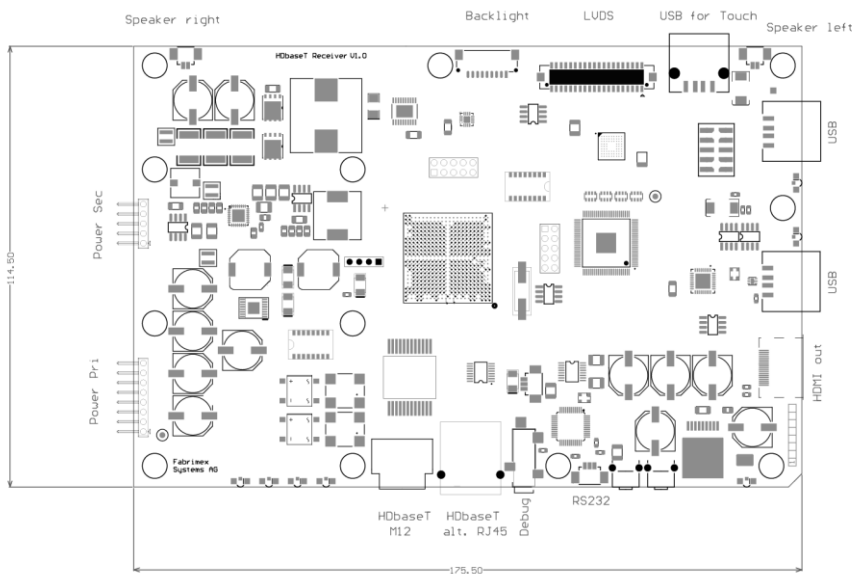

Specifications subject to change without notice

Accessories:

- Power Adapter 50 Watt, 24V DC External for Transmitter Card
- DC/DC Converter for LCD Power
- LVDS Cable
- Ethernet Cat6 Cable