


SLK-HD-Tx

HDBaseT PCIe Transmitter Card
with HDMI, USB, Audio and
Power Transmission



Specification

Model Name:	SLK-HD-Tx
Form Factor:	PCIe x1 Standard Height Card
HDBaseT Chip:	VS2310
HDMI:	HDMI 2.0, HDMI 1.4
USB:	USB 2.0
Audio:	Audio over USB
Power over HDBaseT:	Up to 100W
Maximum Distance:	100m
Connectors:	RJ45, Mini USB, HDMI, Power
Power Consumption Card:	5 Watt Typical, Normal Operation
Dimensions W x H x D:	167.7 x 111.2 x 21.6 mm
Mounting:	PCIe x1
Operating Temperature:	0°C to +50°C, 10% ~ 90% RH non-condensing
Storage Temperature:	-20°C to +60°C, 10% ~ 90% RH non-condensing
Matching Transmitter:	SLK-HD-Rx
Weight:	0.8 Kg
Certification:	CE / RoHS / WEEE Compliant

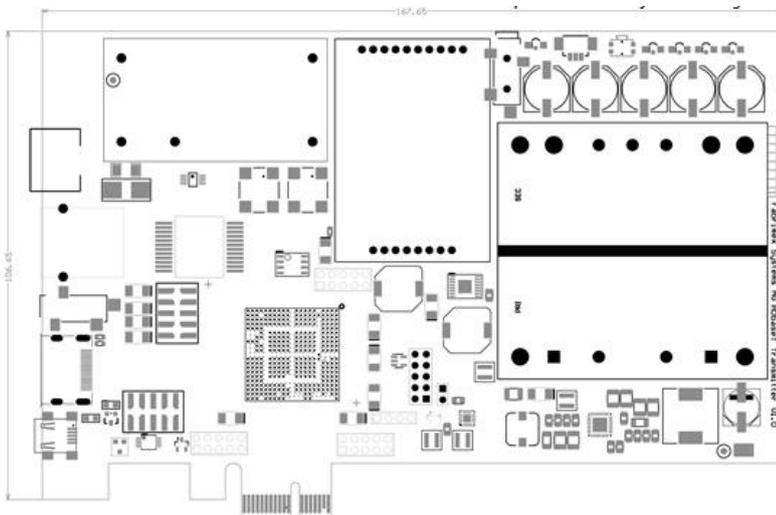

Specifications subject to change without notice

Accessories:

Power Adapter 50 Watt, 24V DC External for Transmitter Card
HDMI Cables, HDMI Adapter Cables, USB Cables, Ethernet Cables
Housing


SLK-HD-Tx-Ext

HDBaseT PCIe Transmitter Box
with HDMI, USB, Audio and
Power Transmission



Specification

Model Name:	SLK-HD-Tx-Ext
HDBaseT Chip:	VS2310
HDMI:	HDMI 2.0, HDMI 1.4
USB:	USB 2.0
Audio:	Audio over USB
Power over HDBaseT:	Up to 100W
Maximum Distance:	100m
Connectors:	RJ45, Mini USB, HDMI, Power
Power Consumption Card:	5 Watt Typical, Normal Operation
Dimensions W x H x D:	184 x 132.8 x 39.2 mm
Mounting:	DIN Rail Mount
Operating Temperature:	0°C to +50°C, 10% ~ 90% RH non-condensing
Storage Temperature:	-20°C to +60°C, 10% ~ 90% RH non-condensing
Matching Transmitter:	SLK-HD-Rx
Weight:	0.8 Kg
Certification:	CE / RoHS / WEEE Compliant

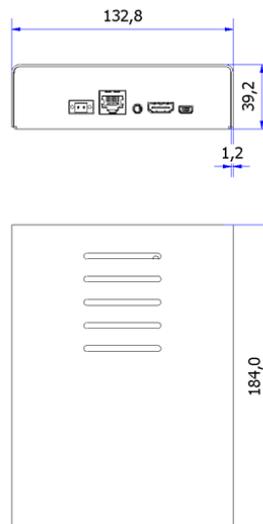

Specifications subject to change without notice

Accessories:

Power Adapter

HDMI Cables, HDMI Adapter Cables, USB Cables, Ethernet Cables